


# HIG 072

Integral AC component  
Fully isolated for extreme safety  
Available in 5m and 10m reel  
3M double-sided tape

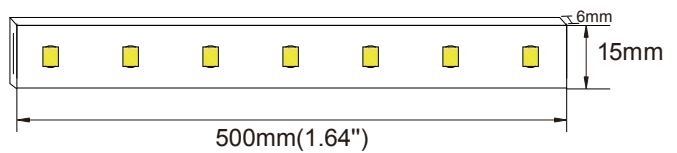

**HIG 10W 072 IP65 . 927**

Model Power LED nr. IP grade CCT

Model	CCT
HIG	927 2700K
	930 3000K
Power	
10W [W/m]	940 4000K
	950 5000K
	960 6000K
LED Nr.	
072 [led/m]	
IP grade	
IP65	

## Accessories

Power cord IP40 (30cm cable)	ACC00001
Jumper connector IP40 (30cm cable)	ACC00002
Straight connector IP40	ACC00003
Corner connector IP40	ACC00004
End cap IP40	ACC00005
Mounting clip	ACC00006
Aluminium mounting profile L=1m	ACC00007

## Features

LED type	SMD2835
LED nr.	72LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

## Performance

Lumen output (at 85°C)	1000 – 1100lm/m (304 – 335lm/ft)
Color rendering index	>90
Efficacy	100 – 110lm/W

## Electrical and control

Supply type	Constant voltage
Input voltage	AC240V
Input current	0.043A/m (0.013A/ft)
Max. power consumption	10W/m (3W/ft)
Dimming	External

## Physical

Minimum cut	500mm (19.68")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

