


RGBK 096



All-in-one chipset
Full color mixing
Very reliable product
3M double-sided tape

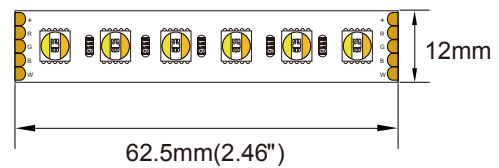

RGBK 21W 096 IP20 .5CC

Model Power LED nr. IP grade RGB+CCT

Model IP grade

RGBK IP20
IP67

Power CCT

21W [W/m] 5CC RGB+2700K+6000K

LED Nr.

096 [led/m]

Features

LED type	SMD5050
LED nr.	96LEDs/m
Standard CCT	RGB+2700K/6000K
Other CCT upon request	N.A.
Beam angle	120°

Performance

Lumen output (at 85°C)	RGB 495lm/m - 756White lm/m
Color rendering index	>90(2700K) >80(6000K)
Efficacy	14 – 90lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.87A/m (0.26A/ft)
Max. power consumption	21W/m (6.4W/ft)
Dimming	External

Physical

Minimum cut	62.5mm (2.46")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

Accessories

Connection kit IP67 (RGBK strip)	ACC00036
Set off 5 mounting clips	ACC00037

