



# RGBW 060

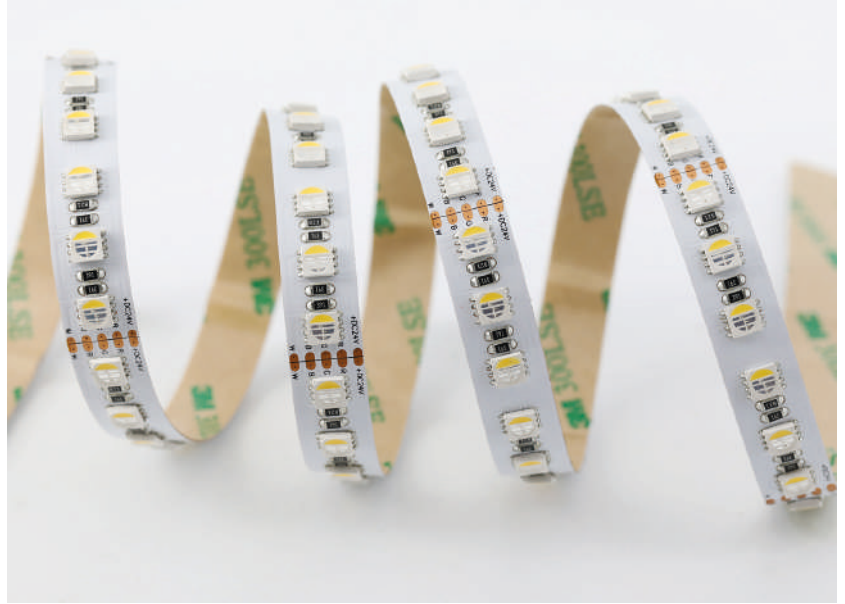

All-in-one chipset  
Full color mixing  
Very reliable product  
3M double-sided tape

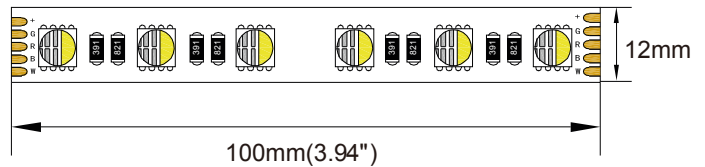

**RGBW 14W 060 IP20 . CC3**

Model Power LED nr. IP grade RGB+CCT

**Model**  
RGBW

**CCT**  
CC3 *RGB+3000K*  
CC4 *RGB+4000K*  
CC6 *RGB+6000K*

**Power**  
14W [W/m]

**LED Nr.**  
060 [led/m]

**IP grade**  
IP20  
IP65  
IP67  
IP68

## Accessories

Connection kit IP67 (RGBW strip) *ACC00034*  
Set off 5 mounting clips *ACC00035*

## Features

|                        |                       |
|------------------------|-----------------------|
| LED type               | SMD5050               |
| LED nr.                | 60LEDs/m              |
| Standard CCT           | RGB+3000K/4000K/6000K |
| Other CCT upon request | N.A.                  |
| Beam angle             | 120°                  |

## Performance

|                        |                             |
|------------------------|-----------------------------|
| Lumen output (at 85°C) | RGB 545lm/m - White 370lm/m |
| Color rendering index  | N.A.                        |
| Efficacy               | 34 – 102lm/W                |

## Electrical and control

|                        |                    |
|------------------------|--------------------|
| Supply type            | Constant voltage   |
| Input voltage          | DC24V              |
| Input current          | 0.6A/m (0.18A/ft)  |
| Max. power consumption | 14.4W/m (4.39W/ft) |
| Dimming                | External           |

## Physical

|                       |               |
|-----------------------|---------------|
| Minimum cut           | 100mm (3.94") |
| Reel length           | 5m (16.40')   |
| Weight                | 0.05kg/m      |
| Operating temperature | -25/+55°C     |
| ESD Protection        | +/- 2000V     |

