
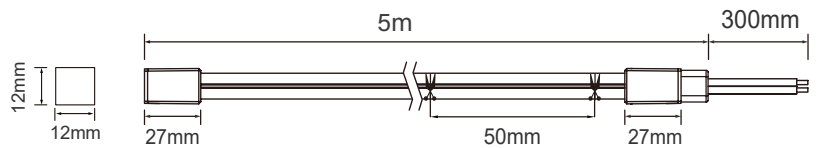


WAP 1212

Silicone extrusion
Fully waterproof
Available in 5m and 10m reel (upon request)
Cuttable on site

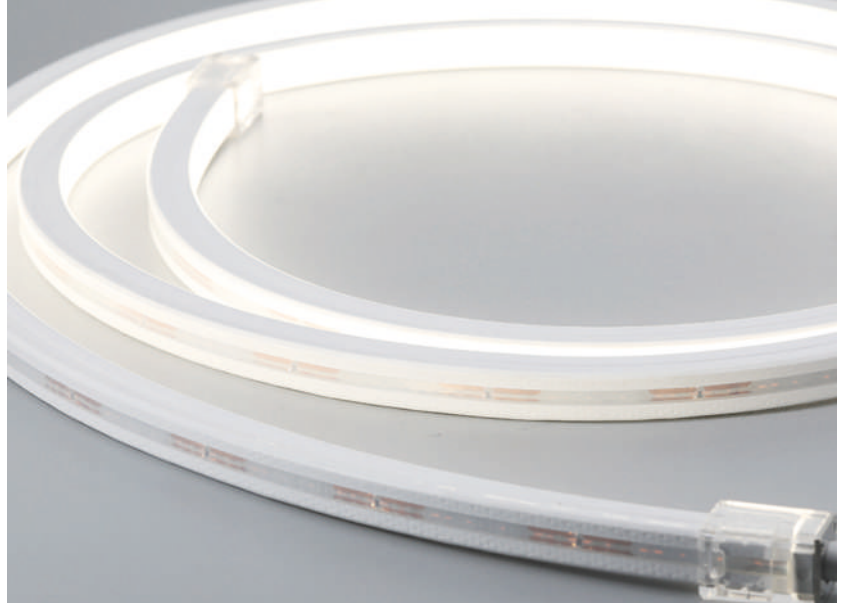

WAP 10W 1212 IP67 . 927

Model Power Dimensions IP grade CCT

| Model | CCT | |
|-----------|-----|-------|
| WAP | 927 | 2700K |
| | 930 | 3000K |
| Power | 940 | 4000K |
| 10W [W/m] | 950 | 5000K |
| | 960 | 6000K |

Dimensions
12x12mm

IP grade
IP67

Accessories

| | |
|---------------------------------|----------|
| Front feeding (30cm cable) | ACC00013 |
| Side feeding (30cm cable) | ACC00014 |
| Bottom feeding (30cm cable) | ACC00015 |
| End cap | ACC00016 |
| Stainless steel clip | ACC00017 |
| Aluminium mounting profile L=1m | ACC00018 |

Features

| | |
|------------------------|-------------------------------|
| LED type | SMD2835 |
| LED nr. | 120 LEDs/m |
| Standard CCT | 2700K/3000K/4000K/5000K/6000K |
| Other CCT upon request | 1800K/2100K/2300K/2500K/6500K |
| Beam angle | 120° |

Performance

| | |
|------------------------|--------------------------------|
| Lumen output (at 85°C) | 603 – 795lm/m (184 – 242lm/ft) |
| Color rendering index | >90 |
| Efficacy | 61 – 80lm/W |

Electrical and control

| | |
|------------------------|-------------------|
| Supply type | Constant voltage |
| Input voltage | DC24V |
| Input current | 0.4A/m (0.12A/ft) |
| Max. power consumption | 10W/m (3W/ft) |
| Dimming | External |

Physical

| | |
|-----------------------|--------------|
| Minimum cut | 50mm (1.97") |
| Reel length | 5m (16.40') |
| Weight | 0.20kg/m |
| Operating temperature | -25/+55°C |
| ESD Protection | +/- 2000V |

