
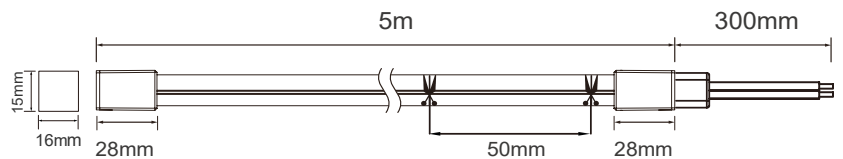


WAP 1615

Silicone extrusion
Fully waterproof
Available in 5m and 10m reel (upon request)
Cutttable on site

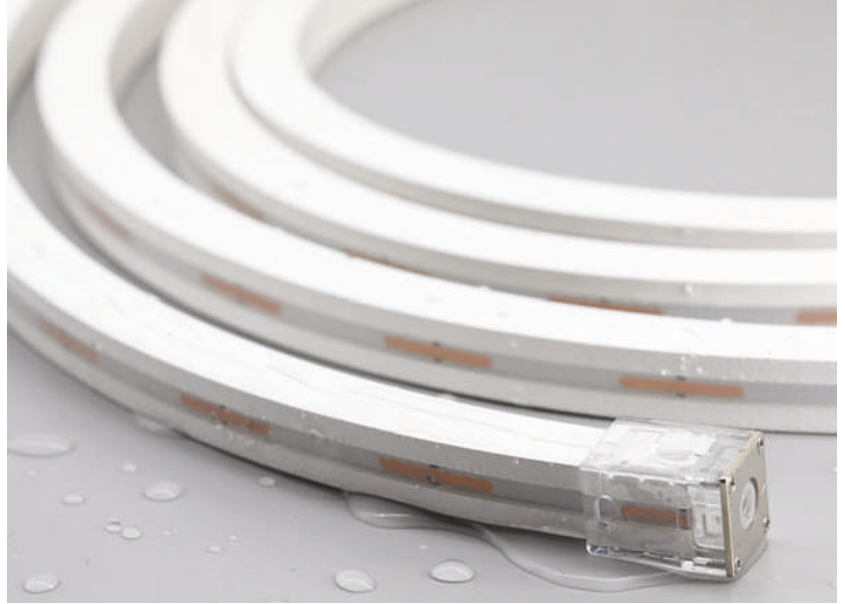

WAP 14W 1615 IP67 . 927

Model Power Dimensions IP grade CCT

Model	CCT	
WAP	927	2700K
	930	3000K
	940	4000K
Power	14W [W/m]	950
		5000K
		960

Dimensions
16x15mm

IP grade
IP67

Accessories

Front feeding (30cm cable)	ACC00019
Side feeding (30cm cable)	ACC00020
Bottom feeding (30cm cable)	ACC00021
End cap	ACC00022
Stainless steel clip	ACC00023
Aluminium mounting profile L=1m	ACC00024

Features

LED type	SMD2216
LED nr.	120LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/2500K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	932 – 1100lm/m (284 – 335lm/ft)
Color rendering index	>90
Efficacy	65 – 76lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.38W/ft)
Dimming	External

Physical

Minimum cut	50mm (1.97")
Reel length	5m (16.40')
Weight	0.30kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

