

PRE 16

High-end professional down light
Higher lumen output
SDCM<3 CRI>90
Multiple reflector finishing options

P16 .06W 015 B IP20 927

Model Power Beam angle Body color IP grade CCT

Model
PRE

IP grade
IP20


Power
06W [W]
09W [W]

CCT
927 2700K
930 3000K
940 4000K

Beam angle
015 [°]
024 [°]
035 [°]

950 5000K

Body color
B Black
W White

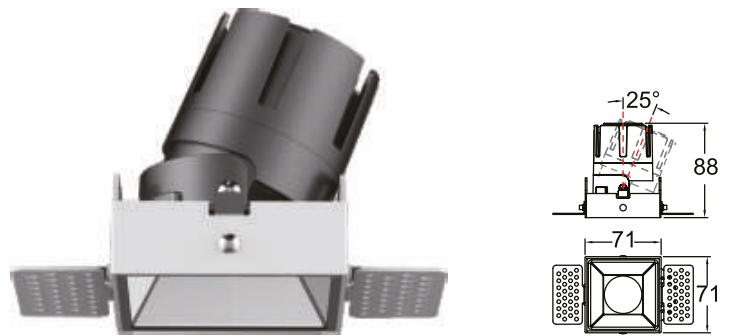

Features

LED type	CREE
Color and CCT	2700K/3000K/4000K/5000K
Other colors	Upon request
Beam angle	15°/24°/35°

Performance

Max. delivered output	700lm (6W) / 1000lm (9W)
Efficacy	117lm/W (6W) / 111lm/W (9W)

Electrical and control

Supply type	Main voltage (Integral LED driver)
Input voltage	AC240V
Max. power consumption	6W/9W
Dimming	Upon request

Physical

Cut out	76x76mm
Housing material	Aluminium
Optics material	PMMA
Weight	-
Operating temperature	-25/+55°C

Accessories

Matt black reflector	ACC00371
Titanium reflector	ACC00372
Bright silver reflector	ACC00373
Matt silver reflector	ACC00374
Matt white reflector	ACC00375
Honeycomb D40	ACC00376
Smooth filter D40	ACC00377
15x70° Oval filter D40	ACC00378

