


RGBK 060



All-in-one chipset
Full color mixing
Very reliable product
3M double-sided tape

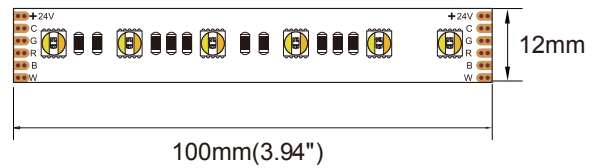

RGBK 14W 060 IP20 .5CC

Model Power LED nr. IP grade RGB+CCT

Model	IP grade
RGBK	IP20
	IP65
Power	IP grade
14W [W/m]	IP67
	IP68
LED Nr.	CCT
060 [led/m]	5CC RGB+2700K+6000K

Features

LED type	SMD5050
LED nr.	60LEDs/m
Standard CCT	RGB+2700K/6000K
Other CCT upon request	N.A.
Beam angle	120°

Performance

Lumen output (at 85°C)	RGB 386lm/m - White 504lm/m
Color rendering index	>90(2700K) >80(6000K)
Efficacy	14 – 90lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.6A/m (0.18A/ft)
Max. power consumption	14.4W/m (4.4W/ft)
Dimming	External

Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

Accessories

Connection kit IP67 (RGBK strip)	ACC00036
Set off 5 mounting clips	ACC00037

